



**NOTES:**


1. CONCRETE STRENGTH 25 MPa MIN. @ 28 DAYS.
2. 10mm WELDED REBAR CAGE BODY.
3. TYPE 1 LID - 1 OR 2 MANHOLES FOR CAST FRAME AND COVER @ \$260.00.
4. TYPE 2 LID - WITH 24" TAPERED CONCRETE LID @ \$260.00
5. TYPE 3 LID - H2O LOAD RATING c/w CHECKER PLATE LID @ \$880.00
6. OIL INTERCEPTOR TANK (BOTTOM DRAWING)
7. 100 IMP. GAL / 500 LITRES
8. 3000 LBS / 1360 KGS
9. MAX. FLOW RATE - 50 LITRES/MIN.
10. RETENTION TIME - 10 MIN.
11. OPERATING TEMP. RANGE - 40-80F / 4-27C
12. SPECIFIC GRAVITY  
OIL - 0.71 - 0.92  
FRESH WATER - 1.00 - 1.03
13. INTERCEPTOR IS H2O RATED.

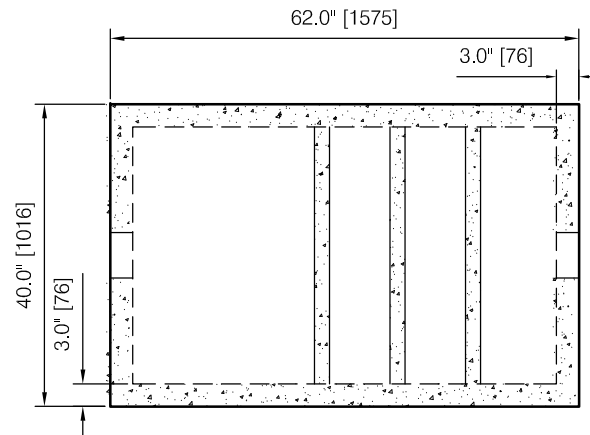


**PLAN VIEW**

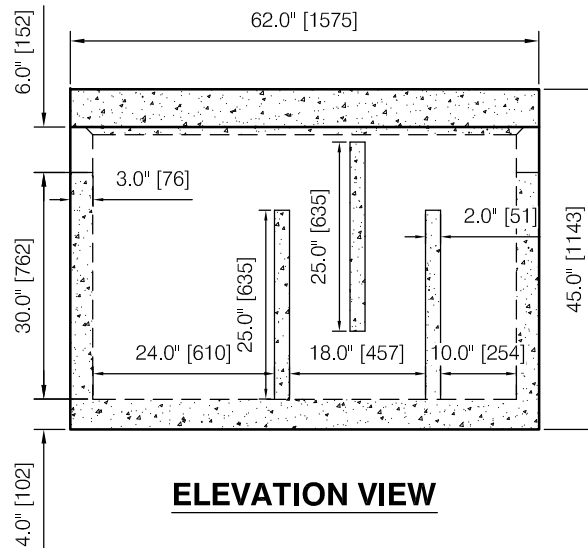


**ELEVATION VIEW**

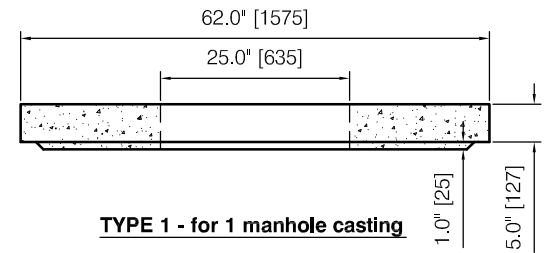

**TYPE 1 - for 1 manhole casting**

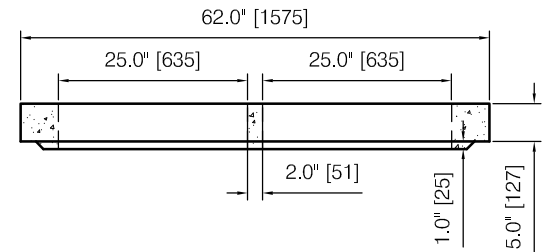

**TYPE 2 - for 2 manhole casting**

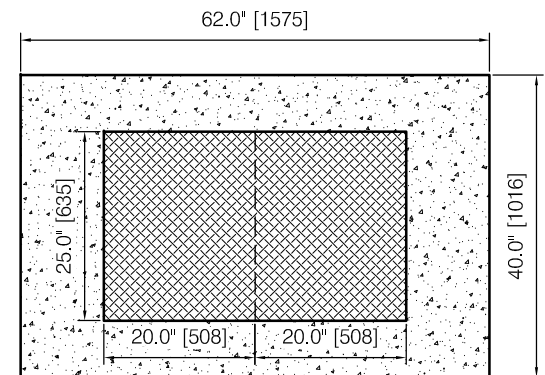

**TYPE 3 - for H2O checkered plate lid**



A Subsidiary of Northern Vac Services Ltd.  
P.O. Box 6868  
Fort St. John, B.C., V1J-4J3  
Phone: (250) 785-3382  
Fax: (250) 785-3381  
Email: nvac@shaw.ca

Project:

**110 GALLON (500 LITRES)  
OIL INTERCEPTOR**

Drawn:	DVT	Checked by:	CL	Dwg No.	--
Date:	Dec 2015	Cert #	--	Rev:	0



A Division of Northern Vac Services Ltd.  
4665 Collier Place  
Williams Lake, B.C., V2G-5E0  
Phone: (250) 392-3169  
Fax: (250) 392-3176  
Web: www.grossoprecast.com