

**TAPER BASE**


<b>LEGEND</b>				
BASE SIZE	A	B	C	D
mm - in	mm - in	mm - in	mm - in	mm - in
1050 - 42	1295 - 51	1067 - 42	114 - 4.5	216 - 8.5
1200 - 48	1473 - 58	1219 - 48	114 - 4.5	216 - 8.5
2400 - 96	2896 - 114	2438 - 96	114 - 4.5	216 - 8.5

**1050Ø & 1200Ø TAPER BASES**

- REINFORCED WITH 10mm REBAR
- 2 GALVANIZED LIFTING EYES
- MINIMUM 30 Mpa @ 28 DAYS

**2400 TAPER BASE**

- REINFORCED WITH 15mm REBAR
- 3 LIFTING INSERTS

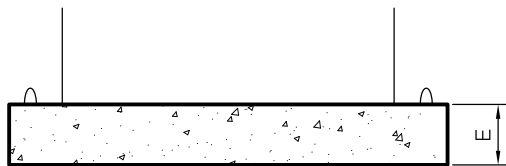


**EXTERNAL BASE**

**EXTERNAL BASES**

- REINFORCED WITH 15mm REBAR @ 12" O.C.
- 4 GALVANIZED LIFTING EYES
- MINIMUM 30 Mpa @ 28 DAYS

<b>LEGEND</b>	
BASE SIZE	E
mm - in	mm - in
900 - 36	150 - 6
1050 - 42	200 - 8
1200 - 48	200 - 8
1500 - 60	250 - 10
2400 - 96	250 - 10

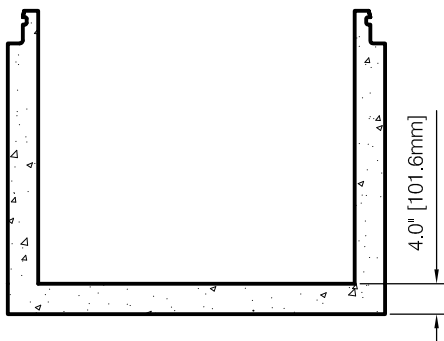

**MONO BASE**

**MONO BASES**

- REINFORCED WITH 10mm REBAR
- MINIMUM 30 Mpa @ 28 DAYS



A Subsidiary of Northern Vac Services Ltd.

P.O. Box 6868  
 Fort St. John, B.C., V1J-4J3  
 Phone: (250) 785-3382  
 Fax: (250) 785-3381  
 Email: nvac@shaw.ca

**TYPICAL MANHOLE BASES**

Drawn: DVT	Checked by: CL	Dwg No. --
Date: March 2015	Cert # --	Rev: 0



A Division of Northern Vac Services Ltd.

4665 Collier Place  
 Williams Lake, B.C., V2G-5E0  
 Phone: (250) 392-3169  
 Fax: (250) 392-3176  
 Web: www.grossoprecast.com